



Lift systems

AMF-BRUNS LINEAR LIFT ‚AL1 SOLID‘

reddot design award
winner 2013

Fully automatic lift for rear and side entry



www.amf-bruns.com

AMF-BRUNS LINEAR LIFT ‚AL1 SOLID‘


Fully automatic lift for rear and side entry



Worldwide unique design due to the specially manufactured aluminium profile lifting arms.



Design meets lightweight! Newly developed aluminium arms make the AL1 the lightest lift on the market.

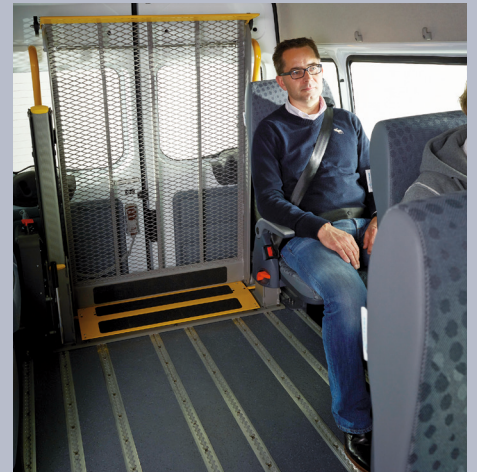


See-through platform design ensures excellent rear view.

SPECIFICATION

- » Patented and specially developed aluminium arms make the AL1 the lightest lift on the market
- » Unique design
- » Applicable for rear and side entry
- » LED flashing lights
- » LED platform lights (Solid 1380), optional
- » Choice of 2 standard platforms
- » See-through platform design ensures excellent rear view
- » Roll-off stop opens automatically when touching ground even on uneven surfaces
- » Bridge plate serves as automatic roll-off stop at the same time (patented)
- » Crash security bolts for more passive security
- » Powder coated surface, KTL coated for additional protection against corrosion
- » EMC tested according to EU regulations
- » Complies with EN 1756-2 and DIN 75078-1

TECHNICAL DATA

- » Lifting height 900 mm
- » Load capacity 400 kg
- » Operation One-hand operation, 4 push buttons (up/down, stow/deploy)
- » Unladen weight 120 - 130 kg, depending on platform size
- » Features Manual pump, 2 handrails, automatic flashing lights
- » Power unit Electro-hydraulic 12 V
- » Optional Bluetooth remote control and app operation (iOS, Android)

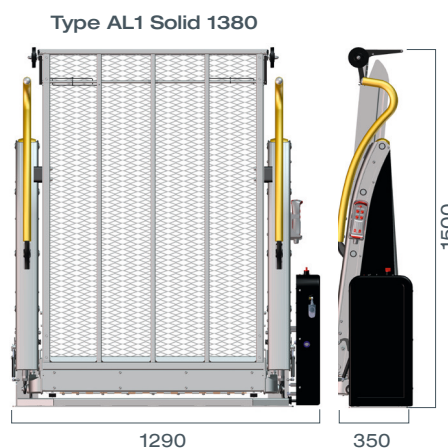

TYPE	AL1 1380	AL1 1130
Width	1,290 mm	1,200 mm
Depth	350 mm	350 mm
Height	1,500 mm	1,250 mm
Usable platform size		
Width	920 mm	830 mm
Length	1,380 mm	1,130 mm



AMF-Bruns GmbH & Co. KG | Hauptstraße 101 | 26689 Apen | Germany
 Phone +49 (0) 44 89 / 72 72 50 | Fax +49 (0) 44 89 / 62 45
 hubmatik@amf-bruns.de

www.amf-bruns.com



DIN EN ISO 9001
 REG.-NR. 01 0105027